



MKP 300-195 SPECIAL POWER CAPACITORS FOR HIGH FREQUENCY INDUCTION HEATING

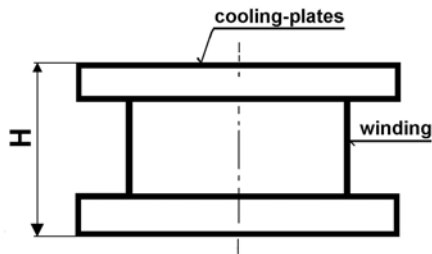

Capacitor 5uF

Dimensions:

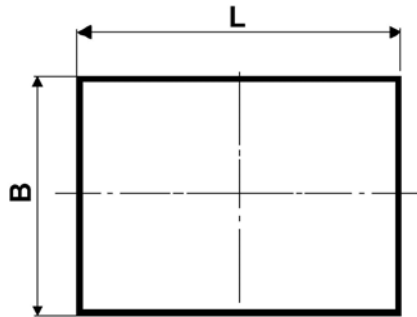

C [μF]	Dimensions [mm]		
	B	L	H
1 ÷ 5	65	80	60

Construction:

Special winding units soldered on metal plates, which ensure cooling of the capacitors. The winding unit have non-inductive, self-healing construction,

Applications:

The capacitors are designed for use in high power and high frequency resonant circuits of induction heating devices.

The construction of contact-plates are adaptable in accordance to customer requirements.

Technical data:

Rated voltage U_R: 1500DC up to +70°C

Max permissible AC voltage: 700 V_{RMS} 50Hz

300V_{RMS} up to 100kHz

Rated capacitance:

1,0 ÷ 10 uF other capacitance on request

Tolerance: ±10%, other tolerance on request

Dissipation factor Tgδ: < 0,0002 at 1kHz and +25°C

ESR: at 100kHz and +25°C < 5mΩ

Self resonant frequency of the winding unit:>

0,5MHz

Working frequency of the capacitors: up to 100kHz

Insulation resistance R_{IS}: 30 000/C [MΩ]

Operating temperature range: -40 ÷ +70°C

The highest permissible capacitor temperature at the hottest point of the case must not exceed +70°C.

Max. permitted dissipation power of the capacitor:

depend on the cooling conditions of the capacitors

Test voltage between terminals: 1 800VDC, 10sec

at +25°C,

All capacitors are tested by the routine test by the producer

Marking for purchase ordering:

MKP300-195 5uF

Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, please, read carefully this technical data-sheet.